

# CONTROL YOU CAN COUNT ON



Flight Simulation



Oil Refineries



Air Traffic Control System

Behind every power supply challenge that involves reliability, flexibility and tight space... there is a Kepco Series HSF/HSP solution.

HOT SWAP REDUNDANT, USER CONFIGURABLE, LOW PROFILE POWER SUPPLIES



# HOT SWAP, REDUNDANT, USER CONFIGURABLE, LOW PROFILE POWER SUPPLIES



## SERIES HSF

The Kepco HSF series of hot-swappable plug-in power supplies are designed to be combined in an N+1 fault-tolerant power system. Built-in active current sharing and or-ing diodes are provided for this purpose. HSF may also be used independently as a multi-output power supply.

**HSF 1UR 50W, 100W AND 150W MODELS** are 1U low profile power supplies designed for applications where rack height is critical. Up to 4 single outputs or up to 2 redundant pairs with hot swap capability can fit into a single 19" rack.

**HSF-PFC 3U 50W, 100W AND 150W MODELS** are for high count multi-output (up to 8 independent outputs) and high count parallel applications (up to 4 redundant pairs) with hot swap capability in a single 19" rack.

**HSF 3U 300W, 600W AND 1200W/1500W MODELS** are for high power density applications capable of wide range voltage programmability. Up to 4 single outputs or up to 2 redundant pairs with hot swap capability can fit into a single 19" rack.

### TYPICAL APPLICATIONS

- Industrial Control and Monitoring
- SCADA
- Burn-in and Production Test
- Wireless Communications
- CCTV/Security Systems



### HSF OPTIONS

| FEATURE                        | DESCRIPTION                                                                                                                                                                                                          | AVAILABLE ON MODELS                              | SUFFIX |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|--------|
| Meter                          | Adds front panel meter which displays either voltage or current using a front panel mode switch and includes external current monitoring                                                                             | HSF 300W, 600W and 1500W                         | M      |
| Meter + 0V Functionality       | Adds front panel meter and also allows output voltage adjustment down to 0V while maintaining full functionality for LED, alarm relay and meter                                                                      | HSF 300W and 600W                                | MZ     |
| 0V Functionality (No Meter)    | Similar to standard models except that the relay functions at a lower output voltage and the DC ON indicator functions down to 0V output voltage<br>W models do not require a minimum load for parallel load sharing | Non-metered HSF 600W                             | W      |
| Current Monitor                | Allows current monitoring via an internal sense resistor (This is standard on 300W, 600W and 1200W/1500W models)                                                                                                     | HSF 50W, 100W and 150W (-PFC and -1UR)           | C      |
| Improved Efficiency            | Offers improved efficiency, lighter weight and a 50W, 28V model                                                                                                                                                      | HSF 50W, 100W and 150W (-PFC) and HSF 50W (-1UR) | T      |
| Remote On-Off                  | Allows remote on-off control (This is standard on 300W, 600W and 1200W/1500W models)                                                                                                                                 | HSF 50W, 100W and 150W (-PFC and -1UR)           | X      |
| Current Monitor, Remote On-Off | Includes both current monitoring and remote on-off                                                                                                                                                                   | HSF 50W, 100W and 150W (-PFC and -1UR)           | Y      |



Four HSF modules shown in RA 19-1U Housing



Rear View

## HSF 1U RACK HOUSING

The RA 19-1U rack adapter mounts up to four HSF 50, 100 or 150 Watt-1UR power supplies. Each plug-in power supply is equipped with a power on/off switch, indicator LEDs and voltage test points.

The RA 19-1U provides access to the configuration DIP switches and rack keying without disassembling the rack. It also provides a redundant scheme with modules 1 and 3 being powered from one a-c input and modules 2 and 4 from a second a-c input. Module numbering is left to right facing the front panel.


The rack adapters permit almost any combination of independent, series and/or parallel-redundant operation. Parallel pairs in series provide increased voltage with N+1 redundancy. Each 1U rack adapter can provide up to 200V (series), 140A (parallel), or 100V/70A (parallel-redundant, N+1 pairs). System capability is further increased by multiple 1U rack adapters in parallel/series.



### HSF-1UR MODEL TABLE: 50W / 100W / 150W

| MODEL                         | OUTPUT VOLTS <sup>(1)</sup> | ADJUSTMENT RANGE | OVP SETTING (VOLTS) | OUTPUT CURRENT AMPS <sup>(1)</sup> 0-40°C | OVERCURRENT LIMIT <sup>(2)</sup> (AMPS) | SW RIPPLE mV typ | NOISE (SPIKE) mV max |
|-------------------------------|-----------------------------|------------------|---------------------|-------------------------------------------|-----------------------------------------|------------------|----------------------|
| <b>50 WATT MODELS</b>         |                             |                  |                     |                                           |                                         |                  |                      |
| HSF 3.3-10-1UR <sup>(3)</sup> | 3.3                         | 2.8-3.4          | 3.9~5.1             | 0-10                                      | 10.5                                    | 80               | <120                 |
| HSF 5-10-1UR                  | 5                           | 4.3-5.3          | 5.7~6.4             | 0-10                                      | 10.5                                    | 80               | <120                 |
| HSF 12-4.3-1UR                | 12                          | 11.4-12.6        | 13.5~15.5           | 0-4.3                                     | 4.5                                     | 100              | <150                 |
| HSF 15-3.5-1UR                | 15                          | 13.5-16.5        | 16.8~18.8           | 0-3.5                                     | 3.6                                     | 100              | <150                 |
| HSF 24-2.2-1UR                | 24                          | 22.5-25.5        | 26.8~30.3           | 0-2.2 <sup>(5)</sup>                      | 3.3 <sup>(6)</sup>                      | 100              | <150                 |
| HSF 28-1.8-1UR <sup>(4)</sup> | 28                          | 22.4-30.2        | 32.0~35.0           | 0-1.8                                     | 1.9                                     | 150              | <200                 |
| HSF 48-1.1-1UR                | 48                          | 45.0-51.0        | 54.8~59.9           | 0-1.1                                     | 1.15                                    | 130              | <200                 |
| <b>100 WATT MODELS</b>        |                             |                  |                     |                                           |                                         |                  |                      |
| HSF 3.3-25-1UR <sup>(3)</sup> | 3.3                         | 2.8-3.5          | 3.75~4.7            | 0-25                                      | 26.0                                    | 80               | <120                 |
| HSF 5-20-1UR                  | 5                           | 4.3-5.3          | 5.6~6.4             | 0-20                                      | 20.7                                    | 80               | <120                 |
| HSF 12-8.4-1UR                | 12                          | 11.4-12.6        | 13.3~15.4           | 0-8.4                                     | 8.65                                    | 100              | <150                 |
| HSF 15-6.7-1UR                | 15                          | 13.5-16.5        | 16.8~18.8           | 0-6.7                                     | 6.8                                     | 100              | <150                 |
| HSF124-4.2-1UR                | 24                          | 19.2-26.0        | 26.5~30.0           | 0-4.2                                     | 4.5                                     | 150              | <200                 |
| HSF128-3.5-1UR                | 28                          | 26.5-29.5        | 29.7~34.7           | 0-3.5                                     | 3.6                                     | 150              | <200                 |
| HSF148-2-1UR                  | 48                          | 44.0-52.0        | 54.5~59.5           | 0-2                                       | 2.05                                    | 200              | <300                 |
| <b>150 WATT MODELS</b>        |                             |                  |                     |                                           |                                         |                  |                      |
| HSF 3.3-30-1UR <sup>(3)</sup> | 3.3                         | 2.8-3.4          | 3.75~5.0            | 0-30                                      | 38.5                                    | 80               | <120                 |
| HSF 5-30-1UR                  | 5                           | 4.3-5.53         | 5.6~6.7             | 0-30                                      | 33.0                                    | 80               | <120                 |
| HSF 12-12-1UR                 | 12                          | 9.8-13.0         | 13.3~15.5           | 0-12                                      | 13.7                                    | 100              | <150                 |
| HSF 15-10-1UR                 | 15                          | 12.3-16.5        | 16.8~18.8           | 0-10                                      | 11.0                                    | 100              | <150                 |
| HSF 24-6.3-1UR                | 24                          | 19.2-26.0        | 26.5~30.3           | 0-6.3 <sup>(7)</sup>                      | 10.5                                    | 150              | <200                 |
| HSF 28-5.3-1UR                | 28                          | 23.0-30.2        | 31.5~34.8           | 0-5.3                                     | 5.94                                    | 150              | <200                 |
| HSF148-3.1-1UR                | 48                          | 40.2-52.2        | 54.5~59.8           | 0-3.1                                     | 3.52                                    | 200              | <300                 |

FIGURE 1  
HSF-1UR Output Power vs. Ambient Temperature

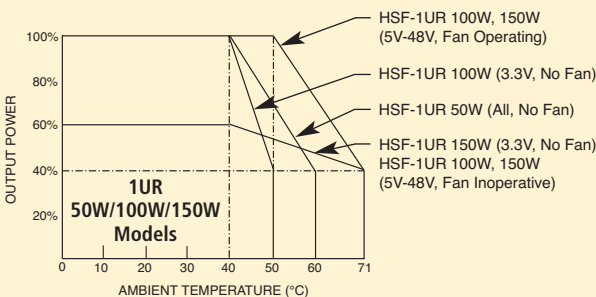

KEPCO, INC. • 131-38 Sanford Avenue • Flushing, NY 11355 USA  
Tel: (718) 461-7000 • Fax: (718) 767-1102  
Email: [hq@kepcopower.com](mailto:hq@kepcopower.com) • [www.kepcopower.com](http://www.kepcopower.com)

- See Temperature vs Output Power Curve, Figure 1.  
Maximum Power Rating (W) = Nominal Output Volts (V) x Maximum Output Current (A).  
Reducing voltage allows operation without degradation at higher current as long as maximum power rating is not exceeded.
- Current Limit is square type (50W) or hiccup type (100W, 150W). After the overload is removed, output is automatically restored.
- Identical units may be paralleled, however forced current sharing is not available.
- T, C, X and Y suffix models only.
- 3.2A peak (peak current and thermal protection applicable to 24V standard (no options) and C suffix models only).
- 2.3A min for 24V, T, X and Y suffix models only.
- 10A peak (peak current and thermal protection applicable to 24V standard (no options) and C suffix models only).

## HSF FEATURES

- Plug-in construction. Easy mount and dismount.
- User configurable combinations of 50, 100, 150 watt plug-in modules in rack adapters RA 19-(X)B for 3U PFC and RA 19-1U for 1UR modules. Combinations of 300, 500 and 1200/1500 watt plug-in modules are accommodated by the RA 19-4C rack adapter.
- Parallel for N+1 redundancy with or-ing diodes built in.
- All models have active PFC (Power Factor Correction).
- NEBS TR-WWT-4063 qualified.
- Front panel voltage trimming.
- Keyed construction to prevent incorrect module placement. The HSF are keyed according to their voltage rating. When the corresponding rack adapter key (pin) is installed by a user, only an HSF of the correct voltage can be inserted into the keyed slot.
- All HSF models (except 1200W/1500W models) provide separate remote error voltage sense terminals: 0.25V drop/wire.
- Active current share is used to configure an N+1 system. When the current share bus of paralleled HSF are connected together, the load current divides equally. If one unit fails, the remaining units will divide the load equally among themselves and continue to supply uninterrupted current to a critical load. The failed unit is isolated by built-in or-ing diodes.
- A built-in relay provides either normally open (close on failure) or normally closed (open on failure) contacts that may be used to provide an external failure indication.
- The HSF obtain mains power and provide output via a 24 pin connector that mates with a corresponding connector in the rack adapter.
- Safety: HSF 1UR, 600W, 1200W/1500W units certified to UL 60950-1, 1st Edition, 2007-10-31 (Information Technology Equipment – Safety – Part 1: General Requirements). All other models are designed to meet the same standard.
- Bellcore requirements: designed to meet NEBS GR-63-CORE specifications. Certified for an RA 19-6B with six HSF 150W plug-ins tested per GR-63-CORE, level 4 (earthquake and office vibration).
- Redundant AC mains input is a design point in all HSF series rack adapters as an additional layer of system redundancy.



Model HSF 5-10PFC 50W

## HSF 3U MODEL TABLE: 50W/100W/150W

| MODEL                        | OUTPUT VOLTS | ADJUSTMENT RANGE VOLTS | OVP SETTING VOLTS | OUTPUT CURRENT <sup>(1)</sup> AMPS 0-40°C | CURRENT LIMIT <sup>(2)</sup> AMPS min | SW RIPPLE mV p-p typ | NOISE (spike) mV p-p max |
|------------------------------|--------------|------------------------|-------------------|-------------------------------------------|---------------------------------------|----------------------|--------------------------|
| <b>50 WATT MODELS</b>        |              |                        |                   |                                           |                                       |                      |                          |
| HSF 3.3-10PFC                | 3.3          | 2.8-3.4                | 3.9~5.1           | 10                                        | 13.1                                  | 80                   | 120                      |
| HSF 5-10PFC                  | 5            | 4.3-5.3                | 5.7~6.4           | 10                                        | 10.5                                  | 80                   | 120                      |
| HSF 12-4.3PFC                | 12           | 11.4-12.6              | 13.5~15.5         | 4.3                                       | 4.5                                   | 100                  | 150                      |
| HSF 15-3.5PFC                | 15           | 13.5-16.2              | 16.8~18.8         | 3.5                                       | 3.6                                   | 100                  | 150                      |
| HSF 24-2.2PFC                | 24           | 22.5-25.5              | 26.8~30.3         | 2.2 <sup>(4)</sup>                        | 3.3 <sup>(5)</sup>                    | 100                  | 150                      |
| HSF 28-1.8PFC <sup>(3)</sup> | 28           | 22.4-30.2              | 32.0~35.0         | 1.8                                       | 1.9                                   | 150                  | 150                      |
| HSF 48-1.1PFC                | 48           | 44.0-52.0              | 54.8~59.9         | 1.1                                       | 1.15                                  | 200                  | 200                      |
| <b>100 WATT MODELS</b>       |              |                        |                   |                                           |                                       |                      |                          |
| HSF 3.3-20PFC                | 3.3          | 2.8-3.4                | 3.75~5.1          | 20                                        | 26.2                                  | 80                   | <120                     |
| HSF 5-20PFC                  | 5            | 4.3-5.3                | 5.7~6.4           | 20                                        | 21                                    | 80                   | <120                     |
| HSF 12-8.5PFC                | 12           | 11.4-12.6              | 13.7~15.7         | 8.5                                       | 8.92                                  | 100                  | <150                     |
| HSF 15-7PFC                  | 15           | 13.5-16.5              | 17.0~19.0         | 7.0                                       | 7.35                                  | 100                  | <150                     |
| HSF 24-4.5PFC                | 24           | 19.2-26.0              | 27.0~30.5         | 4.5 <sup>(6)</sup>                        | 6.82 <sup>(7)</sup>                   | 100                  | <150                     |
| HSF 28-3.8PFC                | 28           | 26.5-29.5              | 32.0~35.0         | 3.8                                       | 3.99                                  | 100                  | <150                     |
| HSF 48-2.1PFC                | 48           | 44.0-52.0              | 53.5~60.0         | 2.1                                       | 2.2                                   | 130                  | <200                     |
| <b>150 WATT MODELS</b>       |              |                        |                   |                                           |                                       |                      |                          |
| HSF 3.3-30PFC                | 3.3          | 2.8-3.4                | 3.75~5.1          | 30                                        | 36.7                                  | 80                   | 120                      |
| HSF 5-30PFC                  | 5            | 4.3-5.3                | 5.6~6.5           | 30                                        | 31.5                                  | 80                   | 120                      |
| HSF 12-13PFC                 | 12           | 9.6-13.2               | 13.7~15.7         | 13                                        | 13.65                                 | 100                  | 150                      |
| HSF 15-10PFC                 | 15           | 12.5-16.5              | 17.0~19.0         | 10                                        | 10.5                                  | 100                  | 150                      |
| HSF 24-6.5PFC                | 24           | 19.2-26.4              | 27.0~30.5         | 6.5 <sup>(8)</sup>                        | 10.5                                  | 100                  | 150                      |
| HSF 28-5.5PFC                | 28           | 22.4-30.8              | 32.0~35.0         | 5.5                                       | 5.78                                  | 100                  | 150                      |
| HSF 48-3.3PFC                | 48           | 38.4-52.8              | 53.5~60.0         | 3.3                                       | 3.46                                  | 130                  | 200                      |

(1) See Temperature vs. Output Power curve, Figure 2.

(2) Current limit is square type or hiccup type (100W, 150W options T, C, X and Y).

After the overload is removed, output is automatically restored.

(3) T, C, X and Y suffix models only.

(4) 3.2A peak (peak current and thermal protection applicable to 24V standard (no options) and C suffix models only.)



(5) 2.3A min. for 24V - T, C, X and Y suffix 50W models only.

(6) 6.5A peak (peak current and thermal protection applicable to 24V model only).

(7) 4.6A min. for 24V - T, C, X and Y suffix 100W models only.

(8) 10.6A peak (peak current and thermal protection applicable to 24V model only).

**FIGURE 2**  
HSF-PFC  
Output Power  
vs.  
Ambient Temperature

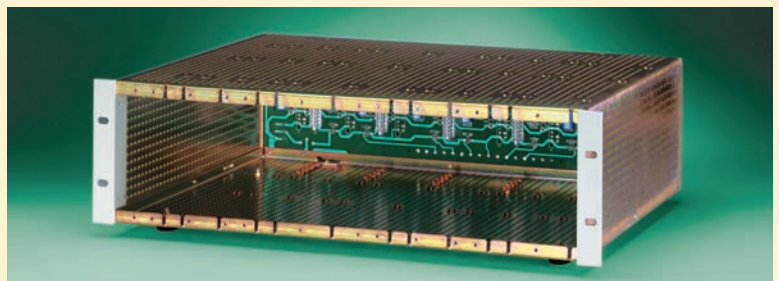

RA 19-(X)B for HSF PFC Models 5 1/4" H x 19" W x 14.5" D

### HSF 3U MODEL TABLE: 300W

| MODEL     | OUTPUT VOLTS | OVP SETTING <sup>(1)</sup> VOLTS V d-c | OUTPUT CURRENT <sup>(2)</sup> AMPS 0-40°C | OVERCURRENT SETTING <sup>(3)</sup> A d-c | RIPPLE <sup>(4)</sup> mV typ | SW NOISE <sup>(4)</sup> (spike) max |
|-----------|--------------|----------------------------------------|-------------------------------------------|------------------------------------------|------------------------------|-------------------------------------|
| HSF 5-60  | 5            | 5.7~7.0                                | 60                                        | 63-78                                    | 80                           | 120                                 |
| HSF 12-27 | 12           | 14.3~16.8                              | 27                                        | 28.4-35.1                                | 120                          | 150                                 |
| HSF 15-22 | 15           | 18.0~21.0                              | 22                                        | 23.1-28.6                                | 120                          | 150                                 |
| HSF 24-14 | 24           | 29.3~33.6                              | 14                                        | 14.7-18.2                                | 150                          | 200                                 |
| HSF 28-12 | 28           | 34.2~39.2                              | 12                                        | 12.6-15.6                                | 150                          | 200                                 |
| HSF 48-7  | 48           | 54.5~59.8                              | 7                                         | 7.4-9.1                                  | 200                          | 200                                 |

- (1) When undervoltage or overvoltage is detected, output is shut OFF. Recovery is either by opening, then reconnecting short across ±RC terminals (no delay), or by removing, and after approximately 40 seconds, reapplying AC input power.
- (2) See Power vs. Temperature, Figure 3, for power derating.
- (3) Square type. If overcurrent condition continues beyond 30 seconds, the output is shut OFF. Recovery is the same as for undervoltage or overvoltage fault (see note 1 above).
- (4) Ripple and noise specifications are 1.5 times indicated values for temperature range of -10 to 0°C. Ripple and noise levels above are satisfied when conditions are 0 to 100% load, 0 to 40°C (derated between 40 and 55°C per Power vs. Temperature, see Figure 2) and bandwidth ≤100MHz.

### HSF 3U MODEL TABLE: 600W

| MODEL     | OUTPUT VOLTS | OVP SETTING <sup>(1)</sup> VOLTS V d-c | OUTPUT CURRENT <sup>(2)</sup> AMPS 0-40°C | OVERCURRENT SETTING <sup>(3)</sup> A d-c | RIPPLE <sup>(4)</sup> mV typ | SW NOISE <sup>(4)</sup> (spike) max |
|-----------|--------------|----------------------------------------|-------------------------------------------|------------------------------------------|------------------------------|-------------------------------------|
| HSF 12-53 | 12           | 14.3~16.8                              | 53                                        | 55.6-68.9                                | 180                          | 220                                 |
| HSF 15-43 | 15           | 18.0~21.0                              | 43                                        | 45.1-55.9                                | 180                          | 220                                 |
| HSF 24-27 | 24           | 29.3~33.6                              | 27                                        | 28.3-35.1                                | 220                          | 320                                 |
| HSF 28-23 | 28           | 34.2~39.2                              | 23                                        | 24.1-29.8                                | 220                          | 320                                 |
| HSF 48-13 | 48           | 54.5~59.8                              | 13                                        | 13.7-16.9                                | 220                          | 320                                 |

- (1) When undervoltage or overvoltage is detected, output is shut OFF. Recovery is either by opening, then reconnecting short across ±RC terminals (no delay), or by removing, and after approximately 40 seconds, reapplying AC input power.
- (2) See Power vs. Temperature, Figure 3, for power derating.
- (3) Square type. If overcurrent condition continues beyond 30 seconds, the output is shut OFF. Recovery is the same as for undervoltage or overvoltage fault (see note 1 above).
- (4) Ripple and noise specifications are 1.5 times indicated values for temperature range of -10 to 0°C. Ripple and noise levels above are satisfied when conditions are 0 to 100% load, 0 to 40°C (derated between 40 and 55°C per Power vs. Temperature, see Figure 2) and bandwidth ≤100MHz.

### HSF 3U ADJUSTMENT RANGE TABLE: 300W

| ADJUSTMENT RANGE <sup>(1)</sup>           | HSF 5-60                      |                |                | HSF 12-27                      |                                |                 | HSF 15-22                      |                                |                 | HSF 24-14                      |                                |                 | HSF 28-12                    |                              |               | HSF 48-7                       |                                |                 |
|-------------------------------------------|-------------------------------|----------------|----------------|--------------------------------|--------------------------------|-----------------|--------------------------------|--------------------------------|-----------------|--------------------------------|--------------------------------|-----------------|------------------------------|------------------------------|---------------|--------------------------------|--------------------------------|-----------------|
|                                           |                               | M              | MZ             |                                | M                              | MZ              |                                | M                              | MZ              |                                | M                              | MZ              |                              | M                            | MZ            |                                | M                              | MZ              |
| External Trimpot or Voltage (V d-c)       | 0 <sup>(2)</sup><br>to<br>5.5 | 0<br>to<br>5.5 | 0<br>to<br>5.5 | 0 <sup>(2)</sup><br>to<br>13.8 | 0 <sup>(2)</sup><br>to<br>13.8 | 0<br>to<br>13.8 | 0 <sup>(2)</sup><br>to<br>17.4 | 0 <sup>(2)</sup><br>to<br>17.4 | 0<br>to<br>17.4 | 0 <sup>(2)</sup><br>to<br>28.2 | 0 <sup>(2)</sup><br>to<br>28.2 | 0<br>to<br>28.2 | 0 <sup>(2)</sup><br>to<br>33 | 0 <sup>(2)</sup><br>to<br>33 | 0<br>to<br>33 | 0 <sup>(2)</sup><br>to<br>52.2 | 0 <sup>(2)</sup><br>to<br>52.2 | 0<br>to<br>52.2 |
| Front Panel Trimpot (V d-c)               | 1.8<br>to<br>5.5              | 0<br>to<br>5.5 | 0<br>to<br>5.5 | 0<br>to<br>13.8                | 5.5<br>to<br>13.8              | 0<br>to<br>13.8 | 6.5<br>to<br>17.4              | 7<br>to<br>17.4                | 0<br>to<br>17.4 | 6.5<br>to<br>28.2              | 7<br>to<br>28.2                | 0<br>to<br>28.2 | 6.5<br>to<br>33              | 7<br>to<br>33                | 0<br>to<br>33 | 6.5<br>to<br>52.2              | 7<br>to<br>52.2                | 0<br>to<br>52.2 |
| Minimum <sup>(2)</sup> Adjustment (V d-c) | 1.8                           | 0              | 0              | 5.5                            | 5.5                            | 0               | 6.5                            | 7                              | 0               | 6.5                            | 7                              | 0               | 6.5                          | 7                            | 0             | 6.5                            | 7                              | 0               |

- (1) Using trimpot to attain voltages outside the specified adjustment range may trigger undervoltage or overvoltage faults.
- (2) Observe minimum for proper functioning of alarm relay, optional meter and LED.

### HSF 3U ADJUSTMENT RANGE TABLE: 600W

| ADJUSTMENT RANGE <sup>(1)</sup>           | HSF 12-53                      |                                |                 |                                | HSF 15-43                      |                                |                 |                                | HSF 24-27                      |                                |                 |                                | HSF 28-23                    |                              |               |                              | HSF 48-13                      |                                |                 |                                |
|-------------------------------------------|--------------------------------|--------------------------------|-----------------|--------------------------------|--------------------------------|--------------------------------|-----------------|--------------------------------|--------------------------------|--------------------------------|-----------------|--------------------------------|------------------------------|------------------------------|---------------|------------------------------|--------------------------------|--------------------------------|-----------------|--------------------------------|
|                                           |                                | M                              | MZ              | W                              |                                | M                              | MZ              | W                              |                                | M                              | MZ              | W                              |                              | M                            | MZ            | W                            |                                | M                              | MZ              | W                              |
| External Trimpot or Voltage (V d-c)       | 0 <sup>(2)</sup><br>to<br>13.8 | 0 <sup>(2)</sup><br>to<br>13.8 | 0<br>to<br>13.8 | 0 <sup>(2)</sup><br>to<br>13.8 | 0 <sup>(2)</sup><br>to<br>17.4 | 0 <sup>(2)</sup><br>to<br>17.4 | 0<br>to<br>17.4 | 0 <sup>(2)</sup><br>to<br>17.4 | 0 <sup>(2)</sup><br>to<br>28.2 | 0 <sup>(2)</sup><br>to<br>28.2 | 0<br>to<br>28.2 | 0 <sup>(2)</sup><br>to<br>28.2 | 0 <sup>(2)</sup><br>to<br>33 | 0 <sup>(2)</sup><br>to<br>33 | 0<br>to<br>33 | 0 <sup>(2)</sup><br>to<br>33 | 0 <sup>(2)</sup><br>to<br>52.2 | 0 <sup>(2)</sup><br>to<br>52.2 | 0<br>to<br>52.2 | 0 <sup>(2)</sup><br>to<br>52.2 |
| Front Panel Trimpot (V d-c)               | 0 <sup>(2)</sup><br>to<br>13.8 | 9<br>to<br>13.8                | 0<br>to<br>13.8 | 5.5<br>to<br>13.8              | 0 <sup>(2)</sup><br>to<br>17.4 | 11.5<br>to<br>17.4             | 0<br>to<br>17.4 | 6.5<br>to<br>17.4              | 0 <sup>(2)</sup><br>to<br>28.2 | 17<br>to<br>28.2               | 0<br>to<br>28.2 | 6.5<br>to<br>28.2              | 0 <sup>(2)</sup><br>to<br>33 | 21.5<br>to<br>33             | 0<br>to<br>33 | 6.5<br>to<br>33              | 0 <sup>(2)</sup><br>to<br>52.2 | 35<br>to<br>52.2               | 0<br>to<br>52.2 | 6.5<br>to<br>52.2              |
| Minimum <sup>(2)</sup> Adjustment (V d-c) | 9                              | 9                              | 0               | 5.5                            | 11.5                           | 11.5                           | 0               | 6.5                            | 17                             | 17                             | 0               | 6.5                            | 21.5                         | 21.5                         | 0             | 6.5                          | 35                             | 35                             | 0               | 6.5                            |

- (1) Using trimpot to attain voltages outside the specified adjustment range may trigger undervoltage or overvoltage faults.
- (2) Observe minimum for proper functioning of alarm relay, optional meter and LED. For W option, LED functions down to 0V.



## HSF 3U MODEL TABLE: 1200W /1500W

| MODEL (1) | OUTPUT VOLTS V d-c | ADJUSTMENT RANGE |                               | OVP SETTING VOLTS(4) V d-c | OUTPUT POWER(5) A d-c/Watts 0-40°C |                      |                    | CURRENT LIMIT(8) A d-c |                   |                    | RIPPLE/ NOISE(11) mV p-p |
|-----------|--------------------|------------------|-------------------------------|----------------------------|------------------------------------|----------------------|--------------------|------------------------|-------------------|--------------------|--------------------------|
|           |                    | TRIMPOT(2) V d-c | VOLTAGE SOURCE(3) % E nominal |                            | 85-90V a-c Input(6)                | 90-170V a-c Input(7) | 170-265V a-c Input | 85-90V a-c Input       | 90-170V a-c Input | 170-265V a-c Input |                          |
| HSF 24-50 | 24                 | 16.8-30.5        | 75-125%                       | 32-35                      | 30-35/<br>720-840                  | 35/840               | 50/1200            | 31-57.5(9)             | 36-57.5(9)        | 52.5-57.5 (10)     | 250/350                  |
| HSF 36-42 | 36                 | 6.1-54.0         | 17-150%                       | 56-60                      | 21-25.2/<br>756-907                | 25.2/907             | 42/1512            | 22.3-36.8(9)           | 26-48.3(9)        | 44.1-48.3 (10)     | 350/450                  |
| HSF 48-32 | 48                 | 33.6-54.0        | 70-115%                       | 56-60                      | 16-19.2/<br>768-922                | 19.2/922             | 32/1536            | 17-36.8(9)             | 20-36.8(9)        | 33.6-36.8 (10)     | 350/450                  |

- (1) For metered version, add suffix "M".
- (2) Either front panel trimpot or external 5K trimpot, except range for HSF 36-42 using front panel trimpot is 11.8-54.0V d-c.
- (3) External voltage source range: 3.5 to 6.5 V d-c for HSF 24-50, 0-5.75V d-c for HSF 36-42, 3.5 to 5.75V d-c for HSF 48-32.
- (4) When undervoltage or overvoltage is detected, output is shut OFF. Recovery is by removing power and reapplying power after approximately 30 seconds, or by opening and reclosing the RC terminals.
- (5) See Power vs. Temperature, Figure 3, and Power vs. Input Voltage, Figure 4, for power derating. If output power (actual output voltage x output current) exceeds limits shown, output is shut OFF. Recovery is by removing power and reapplying power after approximately 30 seconds, or by opening and reclosing the RC terminals.
- (6) 85-95V a-c input for HSF 36-42.
- (7) 95-170V a-c input for HSF 36-42 and HSF 48-32.
- (8) Current limit value determined by combination of input voltage and output voltage setting. For example: if HSF 48-32 with 120V a-c input is set to output 33.6V (adjustment range min.), current limit value is closer to 36.8A (max for 90-170V a-c input). If output is set to 54.0V, overcurrent value is closer to 20A (min. for range 90-170V a-c).
- (9) Winker operation (85-170V a-c input, overcurrent characteristics may be square type, depending on input voltage) or square type (170-265V a-c input). After cause is removed, output voltage is restored automatically.
- (10) Square type (170-265V a-c input). Unit first enters Current Limit; output voltage starts to drop (nearly square curve). If cause is removed while in Current Limit, output voltage restores automatically. If current continues to increase, Overcurrent is triggered. If Overcurrent is combined with an output voltage drop below 60% of rated output voltage (below 5V for 36V model), the unit shuts OFF. Recovery is either by opening, then reconnecting, short across ±RC pins at rack adapter (no delay), or by removing, and after approximately 30 seconds, reapplying a-c input power.
- (11) 0 to 100% load, 0 to 40°C (from 40 to 55°C, see Power vs. Temperature, Figure 3), bandwidth ≤100MHz.



Metered Version HSF  
(Add suffix "M" to the model number)

For full product specs:  
[www.kepcopower.com/hsf.htm](http://www.kepcopower.com/hsf.htm)



FIGURE 3

### HSF 300W/600W/ 1200W/1500W Output Power vs. Ambient Temperature

THE POWER SUPPLY WILL START UP BETWEEN -20 TO -10°C BUT MAY NOT MEET PUBLISHED SPECIFICATIONS

NOTE: Safety agency approvals apply only to operation between -10°C and 40°C.



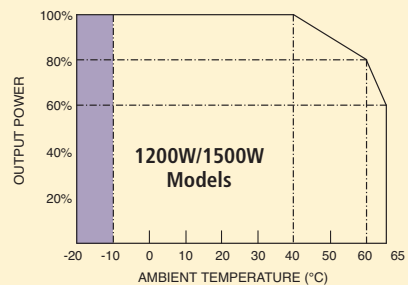


FIGURE 4  
HSF 1200W/1500W  
Output Power  
vs.  
Input Voltage

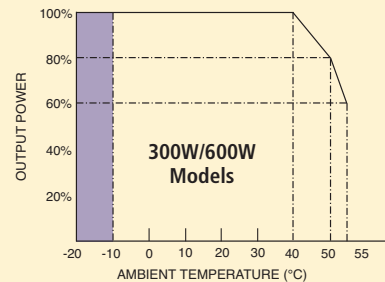

# HOT SWAP, REDUNDANT, USER CONFIGURABLE, LOW PROFILE POWER SUPPLIES

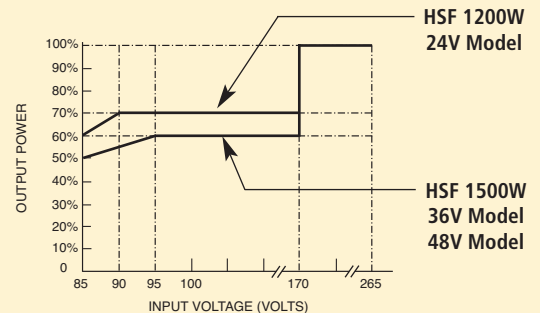

Three HSP models shown in RA 60 Housing

## SERIES HSP

The Kepco HSP series comprises a group of ten models, seven 1000 watt power supplies with outputs from 3.3 volts to 48 volts and three 1500 watt power supplies with outputs from 24 volts to 48 volts. All models feature current-sharing for parallel redundant N+1 operation. Models with the OR-ing diode (suffix R), are capable of hot swapping when plugged into Kepco's RA 60 series rack adapter. A mechanical keying scheme allows the user to define which power supply will plug into a specified slot in the housing. Output voltage and current limit settings are adjustable either remotely or from the front panel.

### HSP FEATURES

- Remote sensing (0.5V for 3.3 and 5V models, 0.8V for all others).
- Control/programming of the voltage channel, current limit, overvoltage set point. Output voltage and current limit are remotely adjustable via 0-5V or 0-10V analog voltage; additionally, output voltage is remotely trimmable by resistance. Both the output voltage and current limit are adjustable over the range 20%-100%.
- Setpoint monitors for voltage and current permit online adjustment of output limits.
- Switch selectable Bellcore-type current "walk-in" characteristic for battery charger applications.
- Front panel status indicators, duplicated by form C relay contact status flags at rear panel connector: POWER, DC FAIL, OVERTEMP, FAN FAIL.
- Safety Agency Approvals: Recognized component operation from a-c mains (Class I) with SELV output per UL 60950 (3rd Ed) and CAN/CSA 22.2 No. 60950-00, CE Marking to EN 60950 (3rd Ed).
- HSP are capable of sustaining full load operation through the loss of one full mains cycle at any source voltage without indication of failure. If mains power is lost for more than one cycle, HSP provides a flag, a minimum of 5 milliseconds before the output loses regulation. Total effective hold-up time exceeds 27 milliseconds.
- 5" x 5" cross-section plug-ins meet EIA standard for 3U height. Fit three abreast in EIA standard 19" equipment racks (four abreast in 24" racks).
- HSP are fully protected for any overload including a short circuit. Normal overload protection is continuous current limiting. A switch selectable option will latch the power off after 20 seconds to avoid damage to load wires. An overvoltage protector latches the power off whenever the output exceeds a user-set limit.
- Remote control of HSP is provided via one of two isolated TTL-level signals, one normally high and the other normally low. An internal 5V supply powers this circuit and provides the auxiliary 5V, 100mA output. This voltage is available whenever source power is applied, whether or not the main output is inhibited. The main output is normally ON if no remote logic is applied.
- HSP meet all EN50082-2 (heavy industrial) immunity levels including mains lightning surge. See also ANSI C62.41.
- Meter option displays actual and programmed values of voltage and current.

### TYPICAL APPLICATIONS

- Redundant Power for Industrial Control Loops
- LED Signage and Monitors
- Battery Charging
- Wireless Base Stations
- Margin Testing

### INDUSTRIES

- Oil, Gas & Petrochemical
- Semiconductor
- Wireless Telecom
- Programmable Signs
- Railway Signalling




Metered Version HSP  
(Add suffix "M" to the model number)

## HSP MODEL TABLE



| SPECIFICATION           | OUTPUT VOLTAGE |             | OVP SETTING      | RATED OUTPUT CURRENT |      |      | RIPPLE |            | NOISE         | EFFICIENCY    |
|-------------------------|----------------|-------------|------------------|----------------------|------|------|--------|------------|---------------|---------------|
|                         | Volts          |             | Volts            | Amps                 |      |      | mV p-p |            | mV p-p        | Percent       |
|                         | Condition      | Factory Set | Adjustment Range | Factory Setpoint     | 50°C | 60°C | 71°C   | Source max | Switching max | (Spike) 20MHz |
| <b>1000 WATT MODELS</b> |                |             |                  |                      |      |      |        |            |               |               |
| HSP 3.3-230R            | 3.3            | 0.7-3.6     | 4.29             | 230                  | 173  | 105  | 20     | 30         | 100           | 68            |
| HSP 5-200R              | 5              | 1.0-5.5     | 6.5              | 200                  | 150  | 95   | 20     | 30         | 100           | 69            |
| HSP 12-84R              | 12             | 2.4-13.2    | 15.6             | 84                   | 63   | 40   | 20     | 40         | 120           | 71            |
| HSP 15-66R              | 15             | 3.0-16.5    | 19.5             | 66                   | 49.5 | 31.4 | 20     | 40         | 150           | 74            |
| HSP 24-42R              | 24             | 4.8-26.4    | 31.2             | 42                   | 31.5 | 20   | 20     | 60         | 240           | 75            |
| HSP 28-36R              | 28             | 5.6-30.8    | 36.4             | 36                   | 27   | 17   | 20     | 60         | 280           | 76            |
| HSP 48-21R              | 48             | 9.6-59.2    | 62.4             | 21                   | 16   | 10   | 20     | 60         | 480           | 78            |
| <b>1500 WATT MODELS</b> |                |             |                  |                      |      |      |        |            |               |               |
| HSP 24-60R              | 24             | 4.8-26.4    | 31.2             | 60                   | 45   | 28.6 | 20     | 60         | 120           | 75            |
| HSP 28-53R              | 28             | 5.6-30.8    | 36.4             | 53                   | 39.8 | 25.2 | 20     | 60         | 140           | 76            |
| HSP 48-30R              | 48             | 9.6-59.2    | 62.4             | 30                   | 22.5 | 14.3 | 20     | 60         | 240           | 78            |

Add suffix "M" to the model number, e.g. HSP 24-42MR, to designate factory installed voltmeter/ammeter.


**FIGURE 5**  
HSP Output Power vs. Ambient Temperature

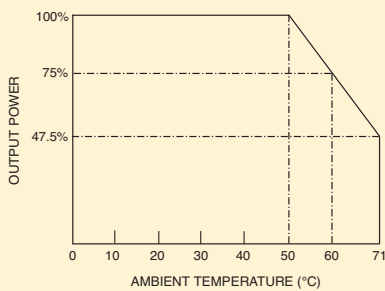

**FIGURE 6**  
HSP 1500W Output Power vs. Source Voltage for Various Ambient Temperatures

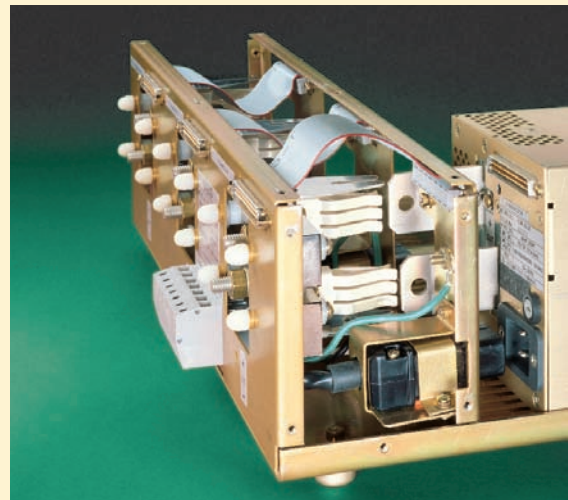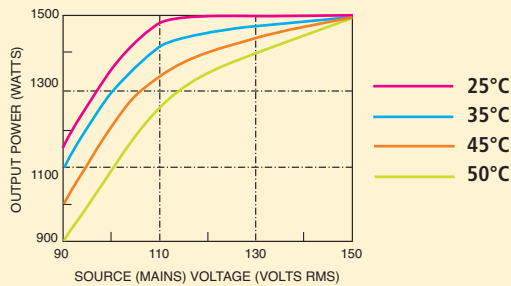

Rear view, cover removed, of the rack housing showing the heavy-duty bus-bar connections that make HSP's "Hot Swap" practical

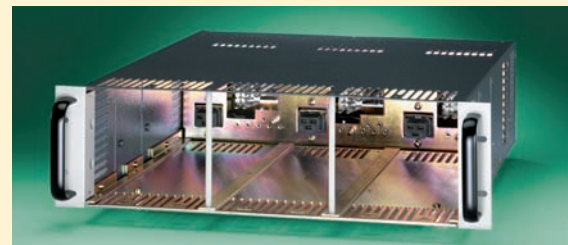

RA 60

For full product specs:  
[www.kepcopower.com/hsp.htm](http://www.kepcopower.com/hsp.htm)



KEPCO, INC. • 131-38 Sanford Avenue • Flushing, NY 11355 USA • Tel: (718) 461-7000 • Fax: (718) 767-1102 • Email: [hq@kepcopower.com](mailto:hq@kepcopower.com) • [www.kepcopower.com](http://www.kepcopower.com)

**GET CONTROL YOU CAN COUNT ON FROM KEPCO**

Data subject to change without notice.  
© 2011 KEPCO, INC. Litho in USA