


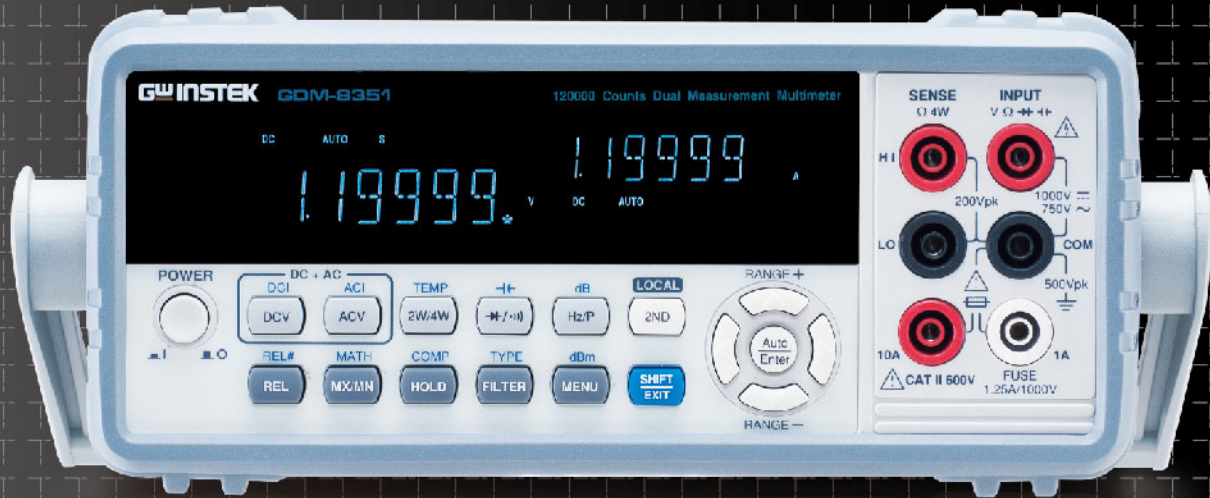

GDM-8351

5 1/2 Digit Dual Measurement Multimeter

3 Year WARRANTY

FEATURES

- 120,000 Counts, VFD Display
- Dual Measurement/Dual Display
- The Basic Precision of DC Voltage : 0.012%
- Selectable Measurement Speeds, the Maximum : 320 Readings/s
- True RMS (AC, AC+DC) Measurements
- Auto/Manual Selection
- 12 Different Measurement Functions : AC/DC Voltage, AC/DC Current, AC+DC Voltage/Current, 2W/4W Resistance, Continuity Beeper, Diode Test, Capacitance, Frequency, Temperature
- Many Auxiliary Functions : Max./Min., REL/REL#, Compare, Hold, dB, dBm, Math(MX+B, %, 1/X)
- Digital I/O Provides Dual Mode(Standard Compare and User Definition Modes)
- Standard RS-232C and USB Device Interface(Support USB CDC and USB TMC Modes)

GW INSTEK
Simply Reliable

GW Instek presents the brand new 5 1/2 Digit Dual Measurement Multimeter-GDM-8351 to replace GDM-8251A of the same category. GDM-8351 features VFD dual-display, maximum 120,000 counts, 0.012% basic DC voltage accuracy and USB/RS232C connectors to provide users with measurement precision, lucid data observation, and the convenient connection with the personal computer. In addition to the fundamental measurement items such as AC/DC voltage, AC/DC current, AC+DC voltage/current, 2W/4W resistance, frequency, temperature measurement, continuity beeper and diode test, GDM-8351 also equips with the capacitance measurement function. Furthermore, the GDM-8351 also provides many auxiliary functions, including maximum/minimum values, dB, dBm, compare, reading hold, algorithms (MX+B, 1/X, %) etc. to meet the measurement requirements for manufacturing process tests, educational experiments and testing facilities. For the external control, the pin of digital I/O interface not only provides the signal output frequently used by the compare function, but also allows users to define signal output for each pin. Under the self-definition mode, users can apply the I/O as a simple digital hardware. The external control requirement can be achieved by signals from each pin so as to help users reduce trouble of making hardware. With respect to remote control and retrieving data, GDM-8351, taking consideration of users' habitual practice and universal system interface, provides standard RS-232C and USB interface to edit control programs and read measurement results. It is worth noting that for utilizing the USB interface, users have options of selecting either USB CDC or USB TMC mode. While USB TMC is selected, users are able to control instrument with the USB interface exactly the same as controlling instrument with the GPIB interface; therefore, the relatively expensive GPIB connection cable is no longer required.

PANEL INTRODUCTION

CE

USB Device

PC Software

RS-232

LabVIEW Driver

Digital I/O

1. VFD Dual Display

2. Measurement Function Keys

3. Auxiliary Function Keys

4. Arrow / Enter Keys

5. Measurement Terminal

6. Digital I/O

7. USB Device

8. RS-232C

9. Socket & Fuse Holder

A. SELECTABLE MEASUREMENT SPEEDS

Displayed digits will not be decreased because of selecting different speeds

GDM-8351 has fastest measurement speed among the same category products and three selectable measurement speeds are available - slow/medium/fast. For instance, the DC voltage

Function vs. Speed(Reading/s)	Slow(S)	Medium(M)	Fast(F)
DCV/DCI/R	10	40	320
ACV/ACI	10	40	320
Continuity Beeper/Diode	10	40	320
Frequency/Period	1	9.8	83
Temperature	10	40	320
Capacitance	2	2	2

measurement can reach 320 readings per second on the fast mode, which can maximize the effectiveness of each measurement

B. DUAL MEASUREMENT/DUAL DISPLAY



GDM-8351, similar to GW Instek 6 1/2 and 5 1/2 digit multimeters, equips with VFD dual display to support the possible combinations of measurement items. For example, the DC voltage and current or DC voltage with AC element will appear when monitoring

	ACV	DCV	ACI	DCI	Freq.	R
ACV	✓	✓	✓	✓	✓	-
DCV	✓	✓	✓	✓	-	-
ACI	✓	✓	✓	✓	✓	-
DCI	✓	✓	✓	✓	-	-
Freq.	✓	-	✓	-	✓	-
R	-	-	-	-	-	✓

components of test wiring. The results of each measurement will simultaneously appear on different displays that not only save users' precious time but also exempt users from the trouble of selecting displays while reading measurement results.

C. VARIOUS MEASUREMENT ITEMS AND FUNCTIONALITIES



GDM-8351 provides various measurement items and functionalities compared with that of the products of same category. There are twelve major measurement items of GDM-8351, including AC voltage/current, DC voltage/current, AC+DC voltage/current, two-wired and four-wired resistance, temperature, frequency, diode

Auxiliary Functions	MAJOR MEASUREMENT ITEMS						
	V	I	R	Hz/P	Temp*	Diode	Capa.
dB	✓	-	-	-	-	-	-
dBm	✓	-	-	-	-	-	-
Max/Min	✓	✓	✓	✓	✓	-	✓
Relative	✓	✓	✓	✓	✓	-	✓
Hold	✓	✓	✓	✓	✓	-	✓
Compare	✓	✓	✓	✓	✓	-	✓
Math	✓	✓	✓	✓	✓	-	-

and continuity beeper test, and even the capability of measuring capacitance. Many auxiliary functions, such as maximum/minimum values, reading hold, relative values, dB, dBm, algorithms (MX+B, 1/X, %) and compare, are designed to reinforce the major measurement items to satisfy users' daily working requirements.


D. CONVNEIENT DIGITAL I/O FUNCTION



H.F	L.F	PASS	EOM	TRIG IN	GND
SET1	SET2	SET3	SET4		

Another difference, while comparing with GDM-8251A, is that the Digital I/O of GDM-8351 provides two different modes which are general and self-definition. With the general mode, Digital I/O will output Hi Fail, Lo Fail, Pass and EOM (measurement results) based upon the results of the compare function and, furthermore, external trigger input is also provided. Under the self-definition mode, users can define output conditions for four pins (SET1~SET4) to execute the external control.

E. FREE SOFTWARE-REMOTE CONTROL AND DATA RETRIEVING

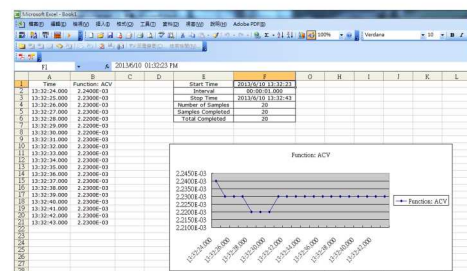

GDM-8351 provides free software-Excel ADDIns for users' easy access. After installing the software, Microsoft Excel will establish Marco for users to directly control the setting of GDM-8351 to record the results of the measurements. The recorded data will be synchronously transformed into graphic displays via Excel drawing function that not only eliminates the cost and time of developing programs but also overcomes the compatibility issue of different programming languages.

F. COMMAND COMPATIBILITY

For GDM-8251A users, GDM-8351 also provides compatible commands. Users can replace machines through the simple setting of GDM-8351 without worrying the extra cost to modify the existing program and the delay of production time.

SPECIFICATIONS (*1)							
Range(*2)	Resolution	Test Current or etc.	Accuracy(*3) 1 Year (23°C±5°C)	Range(*3)	Resolution	Frequency or etc.	Accuracy 1 Year (23°C±5°C)
DC VOLTAGE				True RMS AC (or AC+DC – AC Coupled) Voltage			
100.000mV 1.00000V 10.0000V 100.000V 1000.00V	1μV 10μV 100μV 1mV 10mV	10MΩ or >10GΩ 10MΩ or >10GΩ 11.1MΩ 10.1MΩ 10MΩ	0.012 + 8 0.012 + 5 0.012 + 5 0.012 + 5 0.012 + 5	100.000mV 1.00000V 10.0000V 100.000V 750.00V	1μV 10μV 100μV 1mV 10mV	20Hz ~ 45Hz 45Hz ~ 10kHz 10kHz ~ 30kHz 30kHz ~ 100kHz 20Hz ~ 45Hz 45Hz ~ 10kHz 10kHz ~ 30kHz 30kHz ~ 100kHz 20Hz ~ 45Hz 45Hz ~ 10kHz 10kHz ~ 30kHz 30kHz ~ 100kHz 20Hz ~ 45Hz 45Hz ~ 10kHz 10kHz ~ 30kHz 30kHz ~ 100kHz	1.0 + 100 0.3 + 100 1.5 + 300 5.0 + 300 1.0 + 100 0.2 + 100 1.0 + 100 3.0 + 200 1.0 + 100 0.2 + 100 1.0 + 100 3.0 + 200 1.0 + 100 0.2 + 100 1.0 + 100 3.0 + 200
RESISTANCE				True RMS AC (or AC+DC – AC Coupled) Current			
100.000Ω 1.00000kΩ 10.0000kΩ 100.000kΩ 1.00000MΩ 10.0000MΩ 100.000MΩ	1mΩ 10mΩ 100mΩ 1Ω 10Ω 100Ω 1kΩ	1mA 1mA 100μA 10μA 1μA 0.5μA 0.5μA/10MΩ	0.05 + 8 0.05 + 5 0.05 + 5 0.05 + 5 0.05 + 5 0.30 + 5 3.00 + 8	10.0000mA 100.000mA 1.00000A 10.0000A	100nA 1μA 10μA 100μA	20Hz ~ 45Hz 45Hz ~ 2kHz 2kHz ~ 10kHz 20Hz ~ 45Hz 45Hz ~ 2kHz 2kHz ~ 10kHz 20Hz ~ 45Hz 45Hz ~ 2kHz 2kHz ~ 10kHz	1.5 + 100 0.5 + 100 2.0 + 200 1.5 + 100 0.5 + 100 2.0 + 200 1.5 + 100 0.5 + 100 2.0 + 200
DC CURRENT				FREQUENCY			
10.0000mA 100.000mA 1.00000A 10.000A	100nA 1μA 10μA 100μA	1Ω 1Ω 0.1Ω 0.01Ω	0.05 + 15 0.05 + 5 0.20 + 5 0.20 + 5	(Voltage) 10Hz ~ 1MHz (Current) 20Hz ~ 10kHz	----- -----	----- -----	0.01 + 3 0.01 + 3
CONTINUITY				TEMPERATURE (THERMOCOUPLE)			
1000.00Ω	10mΩ	1mA	0.05 + 5	-200 °C ~ 0 °C 0 °C ~ +300 °C	0.01 °C 0.01 °C	J / T / K J / T / K	0.4 °C (typical) 0.2 °C (typical)
DIODE TEST							
6.0000V	100μV	1mA@6V	0.05 + 15				
CAPACITANCE							
10.00nF 100.0nF 1.000μF 10.00μF 100.0μF	0.01nF 0.1nF 0.001μF 0.01μF 0.1μF	10μA 10μA 100μA 1mA 1mA	2.0 + 10 2.0 + 4 2.0 + 4 2.0 + 4 2.0 + 4				

General

Display	VFD, Two Colors Display
Interface	RS-232C, USB device (USBCDC & USBTMC)
Power Source	AC 100 V / 120 V / 220 V / 240 V ±10%, 50-60Hz ; Power Consumption Max. 15VA
Dimensions & Weight	265(W) x 107(H) x 302(D) mm, approx. 2.9kg

Note:

1. All specifications are applicable to the main (1st) display only and warmed up for at least 30 minutes and operated in the slow rate.
2. 20% overrange on all ranges, except 750V/10A range
3. Accuracy: ± (% of Reading + Digits)

Specifications subject to change without notice.

DM-8351GD1BH

ORDERING INFORMATION

GDM-8351 5 ½ Digit Dual Measurement Multimeter

ACCESSORIES

Safety Instruction Sheet x 1
Power cord x 1
Test lead GTL-207 x 1
CD x 1 (including complete user manual, driver and software)

OPTIONAL ASSESSORIES

GTL-108A 4Wire Test Lead (Kelvin Clip), Approx. 1100mm
GTL-205 Temperature probe adaptor with thermocouple (K-type), Approx. 1000mm
GTL-232 RS-232C Cable, 9-pin female to 9-pin, null modem for computer, Approx. 2000mm
GTL-246 USB Cable, A-B type, Approx. 1200mm
GRA-422 Rack Adapter Panel (19" 2U)

Global Headquarters

GOOD WILL INSTRUMENT CO., LTD.

No.7-1, Jhongsing Road, Tucheng Dist., New Taipei City 236, Taiwan
T +886-2-2268-0389 F +886-2-2268-0639
E-mail: marketing@goodwill.com.tw

China Subsidiary

GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.

No. 521, Zhujiang Road, Snd, Suzhou Jiangsu 215011 China
T +86-512-6661-7177 F +86-512-6661-7277
E-mail: marketing@instek.com.cn

Malaysia Subsidiary

GOOD WILL INSTRUMENT (M) SDN. BHD.

27, Persiaran Mahsuri 1/1, Sunway Tunas,
11900 Bayan Lepas, Penang, Malaysia
T +604-6309988 F +604-6309989
E-mail: sales@goodwill.com.my

Europe Subsidiary

GOOD WILL INSTRUMENT EURO B.V.

De Run 5427A, 5504DG Veldhoven, THE NETHERLANDS
T +31 (0)40-2557790 F +31 (0)40-2541194

U.S.A. Subsidiary

INSTEK AMERICA CORP.

5198 Brooks Street Montclair, CA 91763, U.S.A.
T +1-909-399-3535 F +1-909-399-0819
E-mail: sales@instekamerica.com

Japan Subsidiary

TEXIO TECHNOLOGY CORPORATION.

7F Towata Fudosan Shin Yokohama Bldg., 2-18-13 Shin
Yokohama, Kohoku-ku, Yokohama, Kanagawa,
222-0033 Japan
T +81-45-620-2305 F +81-45-534-7181
E-mail: info@texio.co.jp

Korea Subsidiary

GOOD WILL INSTRUMENT KOREA CO., LTD.

#1406, Ace Hightech-City B/D 1Dong,
Mullae-Dong 3Ga 55-20, Yeongduengpo-Gu, Seoul, Korea
T +82-2-3439-2205 F +82-2-3439-2207
E-mail: gwinstek@gwinstek.co.kr

GW INSTEK
Simply Reliable



www.gwinstek.com



www.facebook.com/GWInstek

Available from



**CALTEST
Instruments Ltd**

Specialists in power
and instrumentation

Power sources and test instrumentation solutions

Caltest have been providing power sources and test instrumentation solutions for over 20 years and are proud to represent a number of industry leading manufacturers.

As well as supplying world class power sources and test instrumentation Caltest also has a service centre and UKAS calibration laboratory.

NEED HELP?

CALL US:

01483 302 700

**or visit our website for
more details**

Caltest Instruments Ltd
4 Riverside Business Centre
Walnut Tree Close
Guildford
Surrey GU1 4UG
United Kingdom

Tel: +44 (0) 1483 302 700

Fax: +44 (0) 1483 300 562

sales@caltest.co.uk

www.caltest.co.uk

Sales • Rentals • Service • UKAS Calibration

