


LOW COST RELIABLE

SINGLE & MULTI-OUTPUT POWER SUPPLIES

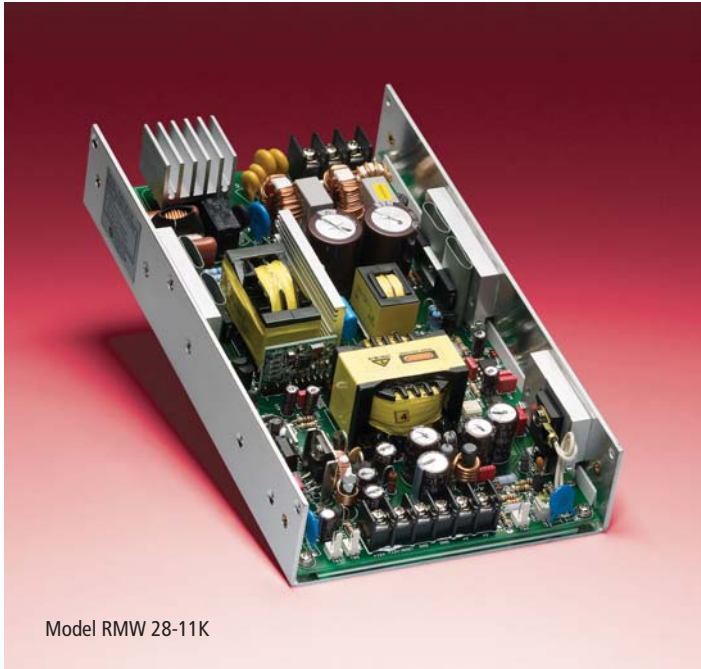

FEATURES

- Single and Triple Output Models
- Universal a-c Input with Power Factor Correction
- Convection Cooled
- Full 300 Watt Operation up to 50°C Ambient
- 120% Peak Power Capability with 18 CFM Forced Air Cooling
- 12 Volt Auxiliary Fan Output
- Remote Error Sensing
- Power OK Signal
- Adjustable Primary Output $\pm 10\%$
- RoHS Compliant

APPLICATIONS

OEM: Security and Fire Alarm Systems, Point of Sale Terminals, LED Signage, Gaming Machines

Factory Automation: Conveyor Systems, Process Control, Robotics

Test: Burn-in, Automotive Test, Instrumentation

RMW MODEL TABLE

MODEL	NOMINAL OUTPUT VOLTAGE	SETTING ACCURACY	ADJUSTMENT RANGE Volts	OVP RANGE ⁽¹⁾ Volts	OUTPUT CURRENT			EFFICIENCY % 115V a-c
					MIN Amps	RATED ⁽²⁾ Amps	MAXIMUM ⁽³⁾ Amps	
RMW 5-60K	5V	$\pm 50\text{mV}$	4.5-5.5	6-7.3	0	60	72	83
RMW 12-25K	12V	$\pm 200\text{mV}$	10.8-13.2	14.3-18.3	0	25	30	88
RMW 15-20K	15V	$\pm 100\text{mV}$	13.5-16.5	19.1-21.6	0	20	23	86
RMW 24-12K	24V	$\pm 200\text{mV}$	21.6-26.4	28.4-33.4	0	12	14.6	88
RMW 28-11K	28V	$\pm 100\text{mV}$	25.2-30.8	33-42	0	11	12.6	88
RMW 48-6.2K	48V	$\pm 1\text{V}$	43.2-52.8	60-67	0	6.25	7.3	90
RMW 51212K-300	1) +5V 2) +12V 3) -12V	$\pm 50\text{mV}$ $\pm 600\text{mV}$ $\pm 600\text{mV}$	4.5-5.5 Fixed Fixed	5.7-7.3 NA NA	0 0 0	32 11 1	45 14 2	85 ⁽⁴⁾

(1) Latch-off mode. (2) Overcurrent protection point 120% - 150% of rated load current, auto-recovery.
 (3) Requires 18 CFM forced air cooling. (4) 85% efficiency for all 3 outputs combined.



RMW INPUT CHARACTERISTICS		
SPECIFICATION	RATING/DESCRIPTION	CONDITION
a-c Voltage	range 85-264V a-c	
Frequency	range 47-63 Hz	
Input Current	115V a-c 4A max 230V a-c 2A max	
Inrush Current	115V a-c 30A max 230V a-c 60A max	Cold start @25°C Ambient EMI suppression caps removed
Leakage Current	<1mA	Line to ground Normal condition
Power Factor	115V a-c .99 (1) 230V a-c .95	Meets EN 61000-3-2 Class D
Switching Frequency	120 KHz	

(1) RMW 5-60K: .96 @ 115V a-c

RMW OUTPUT CHARACTERISTICS		
SPECIFICATION	RATING/DESCRIPTION	CONDITION
Source Effect	range ±1%	±10% change in line voltage
Load Effect	primary ±1%	±40% load change from 60% load
	12V aux. ±3%	
	+12V ±5%	
	-12V ±5%	RMW 51212K-300
Setting Tolerance	See model table	
Transient Recovery Excursion	>700mV ±4% max	>50µsec 20-100° load change
Startup Time	115V a-c 2 sec.	Maximum
	230V a-c 2.sec.	
Holdup Time	20mS typ	115V a-c input rated load
Remote Error Sensing	0.5V per wire	5V output only on RMW 51212K-300
Ripple and Noise	p-p <1%	All outputs, nominal line rated load
Capacitive Loading	≤30,000µF	

RMW GENERAL/ENVIRONMENTAL SPECIFICATIONS		
SPECIFICATION	RATING/DESCRIPTION	CONDITION
Temperature	operating 0 to +50°C	Humidity 10 to 95% RH, non-condensing
	start up 0°C min.	
	storage -20 to +85°C	
Safety Standards	UL 60950-1, CSA 22.2 No. 234, EN 60950-1	UL TÜV
Conducted & Radiated Emissions	FCC Class B CISPR 22 "B"	15KHz to 30MHz
Input Harmonics	EN 61000-3-2	Class D
ESD Immunity	EN 61000-4-2 Criteria B	4KV contact, 8KV air discharge
Radiated Field Immunity	EN 61000-4-3 Criteria A	10V/M, 80% amplitude modulation
Fast Transient/Burst Immunity	EN 61000-4-4 Criteria B	2KV
Surge Immunity	EN 61000-4-5 Criteria B	1KV line to line 2KV line to ground
Conducted Noise Immunity	EN 61000-4-6 Criteria A	10V/M, 80% amplitude modulation
Power Frequency Magnetic Fields	EN 61000-4-8 Criteria A	30A/meter
Voltage Dips/Short Interruption	EN 61000-4-11 Criteria B EN 61000-4-11 Criteria C EN 61000-4-11 Criteria C	30% dips 10mS
		60% dips 100mS
		>95% dips 5000mS
Altitude	≤3000m	
Dimensions HxWxD	1.6" x 5" x 9" 40.6mm x 127.8mm x 228.6mm	
Weight	2.2 lbs., 1 kg	
Cooling	Convection	
Construction	U-Chassis	Cover - optional
Mounting	3 directions	6/32" screws
Connectors	AC Input & DC Output Terminal blocks (3) Molex 5045-02A or equivalent	Fan, remote sense, power OK

FOR MORE INFORMATION



Available from



CALTEST
Instruments Ltd
Specialists in power
and instrumentation

Power sources and test instrumentation solutions

Caltest have been providing power sources and test instrumentation solutions for over 20 years and are proud to represent a number of industry leading manufacturers.

As well as supplying world class power sources and test instrumentation Caltest also has a service centre and UKAS calibration laboratory.

NEED HELP?

CALL US:

01483 302 700

or visit our website for more details

Caltest Instruments Ltd
4 Riverside Business Centre
Walnut Tree Close
Guildford
Surrey GU1 4UG
United Kingdom

Tel: +44 (0) 1483 302 700

Fax: +44 (0) 1483 300 562

sales@caltest.co.uk

www.caltest.co.uk

Sales • Rentals • Service • UKAS Calibration

